

Avex® 1661


For installation information please refer to the tooling overview and manuals on our website www.avdel-global.com.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.



English	Français	Deutsch	Italiano	Español
Dome head	Tête plate	Flachrundkopf	Testa tonda	Cabeza alomada
Body: Aluminium alloy* (2.5 % Mg)	Corps: Alliage d'aluminium* (2.5% Mg)	Hülse: Aluminium* (2.5 % Mg)	Corpo: Lega di alluminio* (2.5% Mg)	Cuerpo: Aluminio* (2.5% Mg)
Natural	Brut	Blank	Nessuna finitura	Natural
Stem: Low carbon steel**	Tige: Acier bas carbone**	Dorn: Stahl**	Gambo: Acciaio a basso tenore di carbonio**	Vástago: Acero bajo en carbono**
Zinc coated	Revêtement zingué	Verzinkt	Zincato	Zincado

*: AA 5052, DIN 1725, AlMg2.5, Werkstoff 3.3523

** : BS3111 Type 0, SAE 1015/1018/1022, DIN 1654, Cq15/Cq22

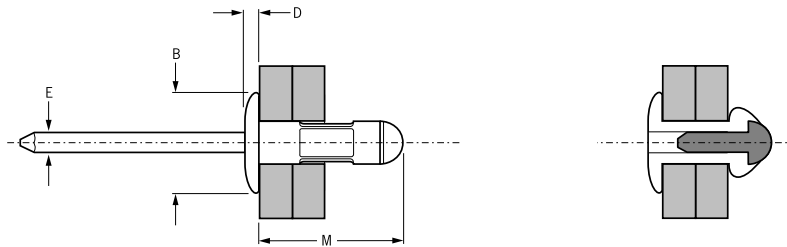

ø	[Cross-section diagram]		[Thread diagram]		M	B	D	E	[Torque diagram]	[Torque diagram]	Part No/ref
	min.	max.	min.	max.							
3.0	0.8	4.3	3.1	3.3	9.1	6.7	1.3	1.7	0.7	0.9	01661-05307
3.2 (1/8")	0.8	4.8	3.3	3.4	10.4	6.7	1.3	1.8	0.7	1.0	01661-00410
	1.2	6.3			12.0						01661-00412
	4.0	7.9			13.6						01661-00414
	5.5	9.5			16.0						01661-00416
4.0 (5/32")	0.5	3.2	4.1	4.2	9.3	8.2	1.6	2.2	1.0	1.6	01661-00508
	0.8	4.7			10.7						01661-00510
	1.2	6.3			12.5						01661-00512
	4.0	9.5			16.2						01661-00516
	6.4	12.7			19.6						01661-00521
4.8 (3/16")	1.6	6.3	4.9	5.0	13.9	10.1	1.8	2.9	1.3	2.3	01661-00613
	4.8	11.1			18.7						01661-00619
	4.8	12.7			20.2						01661-00621
	12.7	19.8			28.2						01661-00631
6.4 (1/4")	1.5	8.3	6.6	6.9	16.8	13.5	2.7	4.0	3.1	2.5	01610-04506 ²⁾

all dimensions in mm / en millimètre / alle Maße in mm / in millimetri / en milímetros

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas

2) stem: zinc plated, clear trivalent passivated / tige: revêtement zingué, passivation claire trivalente / Dorn: verzinkt, klar chromatiert Cr6-frei / gambo: zincato, passivazione chiara trivalente / vástago: zincado, pasivado claro trivalente



Your local distributor for Avdel® products is:
PALMAR PNOMATIK ALET VE BAGLANT ELEMANLARI SAN. VE TIC. LTD. STI.
 Perpa Ticaret Merkezi B Blok Kat 9 No. 1354 • TR-34385 Okmeydani-Istanbul
 Tel: +90-212-210 4041 • Fax: +90-212-210 4043
 Email: info@palmar.com.tr • Website: www.palmar.com.tr

www.avdel-global.com

© 2010 Infastech

Avex® is a trademark of Avdel UK Limited

06a.2007

Data shown is subject to change without prior notice as a result of continuous product development and improvement policy.
 Your local Avdel representative is at your disposal should you need to confirm latest information.